

---


## LK511 4-

- 4-
- : 4 ~ 20 /0 ~ 21
- 
- 
- 
- 
- 
- 
- 
- 

LK511 Profibus-DP,


24

DC/DC.

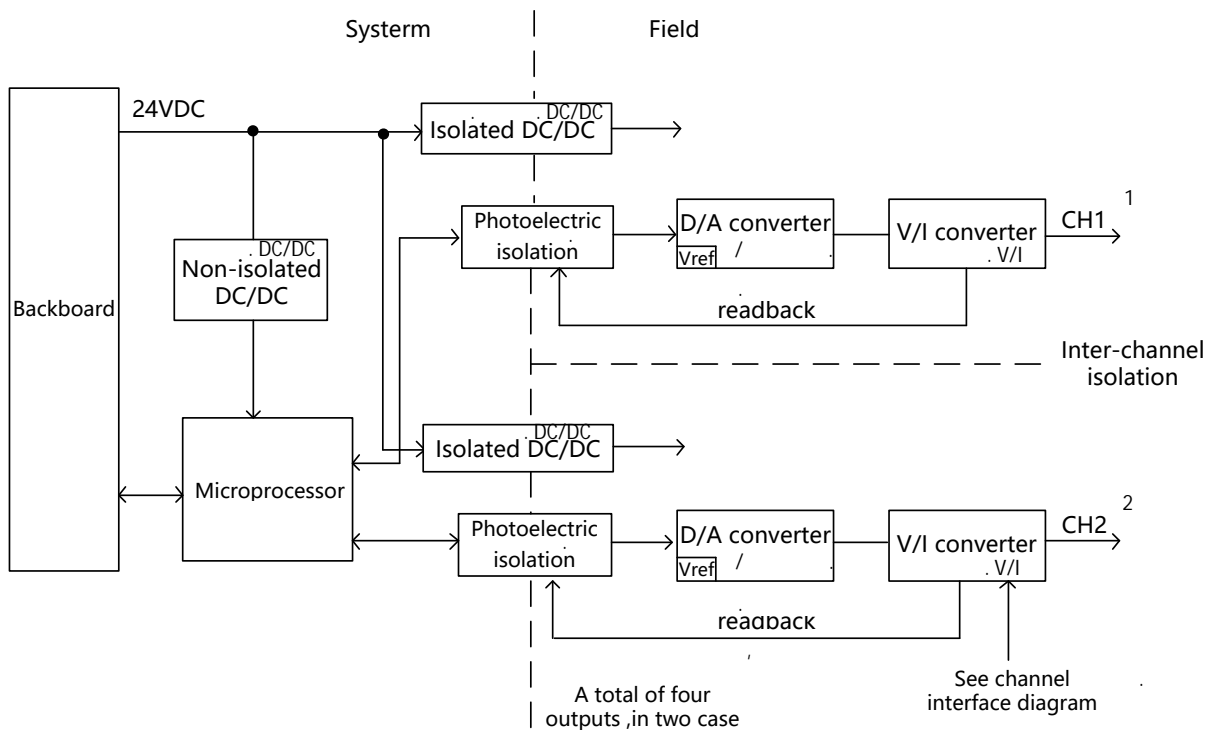

1-1

LK511

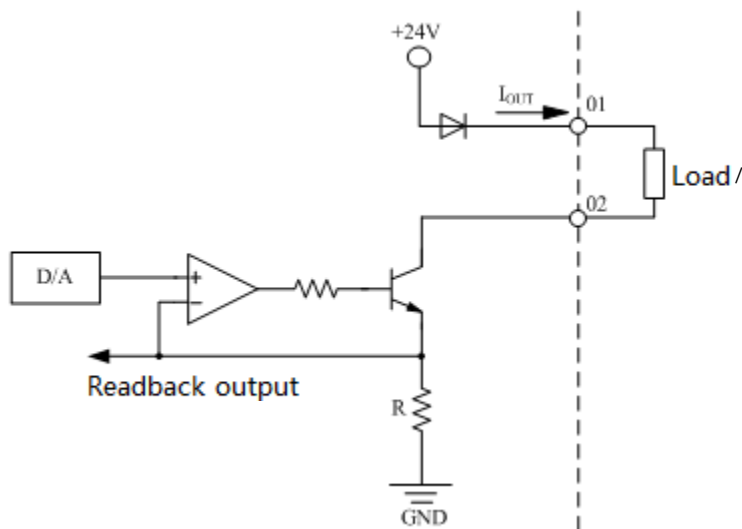

1-2 LK511

LK511 4-

System Power

LK511 4-			
		20,4 ~27,6	
		4 180 24 20 ) ( )	
		4	
		68	69
		4~20	0~21
		0x0000~0xFFFF	0x0000~0xFFFF
		0x00~0xFF	0x00~0xFF
		<2	
		750	
		12	
		8	
		50 ppm/°C	
		500	1 , :5
		500	1 , :5
		0	
		( )	
		( )	
		0~4	0.6% F.S.
		4 ~ 21	0.3% F.S.
		4 ~21 ; 0~4	
		4	
		0.05% F.S.	
		2.5% F.S.	
		(Configure Enable/ 0xA6; ),	
		0xA0	
		0xB2; ( ) 0xA0	
		C1	
		LK	
		x x = 35 x100 x100	

LK511 4-	
	IEC60529 IP20
	200
	0°C~60°C
.	5%~95%,
	-40°C~70°C
.	5%~95%,